

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

JOB3092LYON-Japanese

19. Japan Patent Office (JP)

10. Patent Official Gazette (B) 11. Patent Application Publication No.

Showa 52-12063 (1977)

44. Publication Date: April 4, 1977 (Showa 52)

51. Int. Cl. ²	52. Japanese Cl.	Internal Reference No.	Place for Technology Labeling
H 01 L 21/302	99(5) C 3	7113-57	Number of Claims: 1
B 41 C 1/00	116 A 4	7265-27	

(Total 3 pages)

54. Title of Invention	Method of removing organic films
21. Application No.	Showa 48-34544
22. Date of Filing	March 28, 1973 (Showa 48)
43. Patent Laid-open Date:	November 26, 1974 (Showa 49)
72. Inventor	Hiroshi Ikeda 1450, Jyosui-honcho, Kodaira-shi, Tokyo Musashi Plant, Hitachi, Ltd.
72. Inventor	Masatoshi Iijima 1450, Jyosui-honcho, Kodaira-shi, Tokyo Musashi Plant, Hitachi, Ltd.
71. Applicant	Hitachi Ltd. 1-5-1 Marunouchi, Chiyoda-ku, Tokyo
74. Agent	Toshiyuki Usuda ¹ , Patent Attorney

Claims

1. A method of removing the organic film adhered to a substrate, that removes said organic film while supplying ozone to said organic film.

Detailed explanation of the invention

The present invention relates to a method of removing organic films.

In technologies for photolithographically processing semiconductor wafers, a method that dips the wafer to be processed to which a photoresist film is adhered, in a heated sulfuric acid solution has been known as a method of removing the photoresist film after development.

However, according this method, the ability of the solution to oxidize the photoresist film is not always sufficient, and consequently, the photoresist film cannot be completely etched away.

Therefore, a solution that is made by adding a powerful oxidant, such as $K_2Cr_2O_7$, to sulfuric acid has been tried. However, because $K_2Cr_2O_7$ is toxic and becomes a pollution source, waste liquid disposal becomes costly, resulting in high manufacturing costs.

¹ ILC Note – An alternative way of reading this name is "Susukida".

The present inventor performed photoresist processing of a film on a Si substrate during the manufacture of a linear IC and tried to use a plasma asher method for removing the photoresist film. However, as shown in Figure 2, a problem of deteriorating linear IC characteristics (h_{FE} degradation) was encountered. The cause of this problem is presumed to be as follows. Since the metals, e.g., aluminum, Sn, etc., contained in the photoresist cannot be completely removed with this method, applying a heating process (e.g., diffusion) to the semiconductor device from this state sinters the aforementioned metals into the semiconductor.

Therefore, a decision was made to add a hydrogen peroxide solution, rather than the aforementioned $K_2Cr_2O_7$, to the sulfuric acid solution in order to enhance its etching ability.

With this method, the oxygen in the nascent state generated when the unstable hydrogen peroxide solution decomposes reacts violently with the photoresist, making its removal easier.

However, according to this method, because the etching effect declines as time elapses after the hydrogen peroxide solution is added, the sulfuric acid and hydrogen peroxide solution must be replenished continuously, making the operation inconvenient and the material costs high.

Therefore, the present invention was conceived to enable constant supply of oxygen in the nascent state into sulfuric acid solution. Accordingly, the objective of the present invention is to provide an etching method that completely removes organic films and at the same time that does not have the (pollution) problem of waste liquid disposal or characteristics degradation.

In order to achieve the aforementioned objective, the present invention has a basic configuration of a method of removing the organic film adhered to a substrate, that removes said organic film while supplying ozone to said organic film.

The present invention is explained below with reference to a working example.

Figure 1 shows a working example of the present invention.

Numerals 1 through 7 denote: 1 is a tank; 2 is a sulfuric acid solution (25 ~ 100%) placed inside tank 1; 3 is an ozone generator provided outside; 4 is a pipe for supplying ozone from the ozone generator into solution 2; 5 is a nozzle provided in pipe 4; 6 is a jig on which to place a semiconductor wafer; and 7 is a semiconductor wafer to which the photoresist removal process is to be applied.

Supplying ozone O_3 from ozone generator 3 into sulfuric acid solution 2 inside tank 1, thereby generating oxygen in the nascent state inside the solution and increasing its oxidizing ability, enhances the ability to remove a photoresist, e.g., OMR81 or OMR83 (product names), and cleans the surface of semiconductor wafer 7.

Liquid temperature of between 40 and 150°C is ideal, and a 5-minute dip, for example, can completely remove the photoresist.

According to such a method, ozone O_3 supplied into the sulfuric acid solution and the oxygen in the nascent state generated from ozone O_3 react strongly with the photoresist, completely removing the photoresist.

The conventional method that uses H_2O_2 as the oxidant has a problem in that H_2O_2 must be constantly replenished, resulting in inconvenience and high costs. In contrast, the present working example can use

a commercially available ozone generator to constantly supply ozone using ordinary air as the raw material, thus eliminating the cost of the oxidant.

Furthermore, because the method according to the present invention does not use a toxic substance, a pollution problem stemming from waste liquid disposal is eliminated. Additionally, since the photoresist can be completely removed, the characteristic degradation that occurs with the use of a plasma asher method is also prevented.

The table below summarizes the results of the evaluation of various etching methods according to various criteria. O means that there were no problems at all; Δ means there were some problems; and X means there were serious problems.

Processing method	Waste liquid disposal	Ease of use	Safety	Etching ability	Effects on characteristics
H ₂ SO ₄ K ₂ Cr ₂ O ₇	X	O	O	O	O
Plasma asher method	O	O	O	O	X
H ₂ SO ₄	O	Δ	O	Δ	O
H ₂ SO ₄ H ₂ O ₂	O	Δ	O	O	O
J-100 (product name)	Δ	O	O	Δ	O
Present working example	O	O	O	O	O

(Note that J-100 is the name of a product that consists of a mixture of (1) phenol, (2) alkylbenzene mummhol(??) acid, (3) tetrachloroethylene, and (4) O-dichlorobenzene.)

As is clear from this table, the method in the present working example is the only one that does not have any problems in any of the five criteria, including waste liquid disposal, ease of use, etc.

Note that hydrochloric acid or sulfuric[sic] acid can also be used in place of sulfuric acid as the processing solution. Furthermore, since the effect of O₃ is great, the photoresist can be removed using water instead of an acid.

The present invention can be effectively used in all cases involving the removal of organic films from a substrate.

Brief explanation of the drawing

Figure 1 shows a working example of the present invention.

Figure 2 shows curves showing how h_{FE} deteriorates when a plasma asher process is applied.

1 ... tank, 2 ... sulfuric acid solution, 3 ... ozone generator, 4 ... ozone gas supply pipe, 5 ... nozzle, 6 ... wafer placement jig, 7 ... wafer.

Figure 1

Figure 2

Plasma asher usage condition

Output: 400 W; Pressure: 2.5 Torr; Time: 10 minutes

O₂ flow rate: 300 cc/min (Wet O₂)

J-100 treatment

J-100 treatment

Ashing

Ashing

1/7/1

DIALOG(R)File 351:DERWENT WPI
(c) 2000 Derwent Info Ltd. All rts. reserv.

001809247

WPI Acc No: 77-30226Y/197717

Removing organic photoresist film from silicon semiconductor wafer - by
contacting with inorganic acid soln. and ozone

Patent Assignee: HITACHI LTD (HITA)

Number of Countries: 001 Number of Patents: 001

Patent Family:

Patent No	Kind	Date	Applicat No	Kind	Date	Main IPC	Week
JP 77012063	B	19770404					197717 B

Priority Applications (No Type Date): JP 7334544 A 19730328

Abstract (Basic): JP 77012063 B

The film adhered to the silicon wafer is contacted with inorganic
acid soln. and simultaneously jetted with ozone.

The process is a photographic technique for removing photo-resist
film from a silicon wafer after developing.

Derwent Class: G06; L03; U11; U12

International Patent Class (Additional): H01L-021/30

?

特 許 公 報

昭52-12063

⑤ Int.Cl²

識別記号 ⑥日本分類

庁内整理番号 ④公告 昭和52年(1977) 4 月 4 日

H 01 L 21/302
B 41 C 1/0099(5) C 3
116 A 47113-57
7265-27

発明の数 1

(全 3 頁)

1

2

⑭有機被膜の除去方法

⑰特 願 昭 4 8 - 3 4 5 4 4

⑱出 願 昭 4 8 (1 9 7 3) 3 月 2 8 日

公 開 昭 4 9 - 1 2 3 2 7 7

⑲昭 4 9 (1 9 7 4) 1 1 月 2 6 日

⑳発 明 者 池田宏

小平市上水本町 1 4 5 0 株式会社
日立製作所武威工場内

同 飯島正敏

同所

㉑出 願 人 株式会社日立製作所

東京都千代田区丸の内 1 の 5 の 1

㉒代 理 人 弁理士 薄田利幸

㉓特許請求の範囲

1 基板に付着した有機被膜を除去する方法において、上記有機被膜にオゾンを供給しながら上記有機被膜を除去することを特徴とする有機被膜の除去方法。

発明の詳細な説明

この発明は有機被膜の除去方法に関する。

半導体ウエハの写真処理技術において、現像後フォトリソスト膜を除去する方法として、加熱された硫酸溶液中にフォトリソスト膜が付着した被

処理ウエハを浸漬する方法が従来から知られている。しかし、この方法によれば液のフォトリソスト膜に対する酸化能力が必ずしも充分でないためにフォトリソスト膜を完全に剝離できない欠点があ

つた。そこで、強力な酸化剤である例えば $K_2Cr_2O_7$ を硫酸に添加してつくった溶液を使用して剝離することも試みられたが、 $K_2Cr_2O_7$ は毒性を有し公害源となる廃液処理に費用がかかり、製造費が

高くつくことで問題があつた。本願発明者は、リニア IC の製造において Si

基板上の被膜のフォトリソスト処理を行い、現像後のフォトリソスト膜除去にプラズマアツシャー法の採用を試みたが、第 2 図に示すようにリニア IC の特性劣化 (hFE の低下) を生ずる問題があつた。これは、フォトリソストに含まれた金属、例えばアルミニウム、 Sn 等をこの方法では完全に除去できないことから、そのまま半導体素子に対して加熱処理 (例えば拡散) を施した場合に上記金属が半導体内にシッターされることに起因する

10 るものと考えられる。そこで、硫酸溶液に剝離性を強めるものとして前述の $K_2Cr_2O_7$ に代え、過酸化水素水を添加使用することとした。

これによれば、不安定な過酸化水素水が分解して発生する発生期の酸素がフォトリソストと激しく反応するので、剝離し易くなる。

しかし、この方法によれば過酸化水素水を添加後時間の経過により剝離効果が減少し、次々と硫酸および過酸化水素水を補給する必要があるため

20 作業上不便であるばかりでなく、材料費が高価格となる欠点があつた。そこで、発生期の酸素を常時硫酸溶液内に低価格で供給できるようにするために本発明をなした。したがって、本発明の目的は有機被膜を完全に除去し、且つ排液処理 (公害) 特性劣化の問題の生じないような剝離方法を提供することにある。

上記の目的を達成するための発明の基本的な構成は、基板に付着した有機被膜を除去する方法において上記有機被膜にオゾンを供給しながら上記有機被膜を除去することを特徴とするものである。

以下本発明を実施例により説明する。

第 1 図は本発明の一実施例を示すものである。

1 は箱、2 は箱 1 内に入れられた硫酸溶液 (25~100%)、3 は箱 1 の外部に設けられたオゾン発生装置、4 はオゾン発生装置から溶液 2 内へオゾンを供給するための管、5 は管 4 に設けられたノズル、6 は半導体ウエハ載置用治具、

3

7はフォトリソスト分離処理が施される半導体ウエハである。

槽1内の硫酸溶液2中に、オゾン発生装置3よりオゾン O_3 を供給することにより、溶液中において発生期の酸素 O を発生させ酸化能力を増進させることによりフォトリソスト例えばOMR81、OMR83(商品名)の除去能力を向上させ半導体ウエハ表面7を清浄化する。

液温は40~150℃が好適で例えば5分間の浸漬処理で、フォトリソストをきれいに除去することができる。

このような方法によれば、硫酸溶液中に供給されたオゾン O_3 、およびオゾン O_3 から発生される発生期の酸素 O が、フォトリソストと強力に反応し、フォトリソストが完全に除去される。

また、従来の H_2O_2 を酸化剤として使用する方法によれば、その H_2O_2 を常時補給する必要があるので不便で材料費がかさむという問題があったが、本実施例によれば市販のオゾン発生装置を使用することにより普通の空気を原料としてオゾンを常時供給することができ、酸化剤の原料費が不要である。

さらに、本発明方法によれば有毒物質を使用することがないので、排液処理による公害問題もなく、また、完全にフォトリソストを除去することからプラズマアツシャー方法により除去した場合に生じた特性劣化の問題もない。

次の表は、各剥離方法を各観点から検討した結果をまとめたもので、○は全く問題のないこと、△は若干問題があること、×は非常に大きな問題のあることを示す。

4

処理方法	廃液処理	使い易さ	安全性	剥離能力	特性への影響
H_2SO_4 $K_2Cr_2O_7$	×	○	○	○	○
プラズマアツシャー法	○	○	○	○	×
H_2SO_4	○	△	○	△	○
H_2SO_4 H_2O_2	○	△	○	○	○
J-100 (商品名)	△	○	○	△	○
本実施例	○	○	○	○	○

(なお、J-100は商品名で、①フェノール、②アルキルベンゼンマムホル酸、③テトラクロールエチレン、④○-ジクロロベンゼンを混ぜたもの)

この表からも明らかなように廃液処理、使い易さ等5つの観点からみて全く問題のないのは本実施例の方法だけである。

なお、処理用溶液として硫酸に代え塩酸あるいは硫酸を使用することもでき、また、 O_3 を用いたことによる効果の大きいことから酸に代え水を用いてもフォトリソストの除去を行うことができるものである。

本発明は有機被膜を基板より剥離する場合のすべてに有効に適用できるものである。


図面の簡単な説明

第1図は本発明の一実施例を示すものである。

第2図はプラズマアツシャー処理をしたことによりh_FEが低下することを示す曲線図である。

1……槽、2……硫酸溶液、3……オゾン発生装置、4……オゾンガス供給管、5……ノズル、6……ウエハ載置治具、7……ウエハ。

第1図

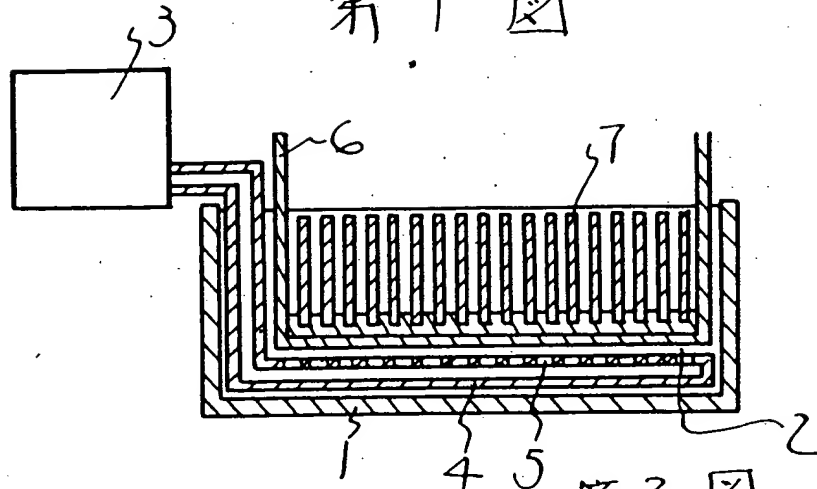

第2図

プラズマアッシャー使用条件

出力: 400W 圧力: 2.5 Torr. 時間: 10分
 O_2 流量: 300 cc/min (Wet O_2)

